K33

FEATURES

- READY TO USE
- INDUSTRIAL DESIGN
- NO BATTERY NEEDED
- EASY TO RESET
- VERSATILE

PIUSI K33 is the most successful mechanical flowmeter on the market. Reliable, easy to install and calibrate, it is equipped with a nutating disc that allows it to be installed in all four flow directions. The display is available in three digits.

PERFORMANCE

UP TO 20-120 L/MIN	UP TO 30 BAR
FLOW RATE	BURSTING PRESSURE
± 1%	0,2%
ACCURACY	REPEATABILITY

K33

PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
K33 METER						
000550160	2,06	4,55	180X180X170		-	1
000551160	2,06	4,55	180X180X170		-	1
000557000	2,06	4,55	180X180X170		-	1
000558000	2,06	4,55	180X180X170		-	1

AIR | ANTIFREEZE | AdBlue® | BIODIESEL | DIESEL | FOOD | GASOLINE | GREASE | KEROSENE | OIL | WATER | WINDSCREEN

CHART

K33

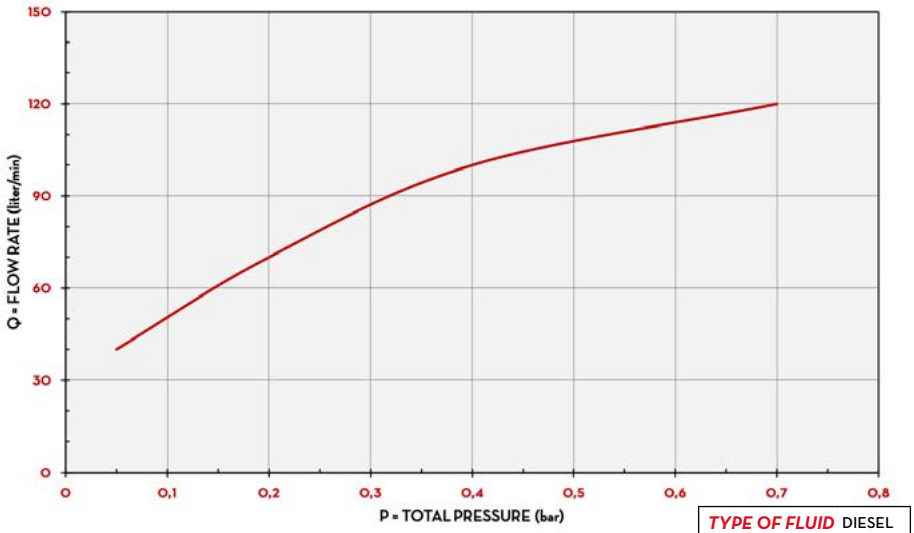

TYPE OF FLUID	DIESEL
TEMPERATURE	16 °C

IN THE BOX

- K33 METER
- INSTRUCTION MANUAL

DETAILS


NUTATING DISK SYSTEM

4 FLOW DIRECTIONS

MECHANICAL COUNTER

DIMENSIONS

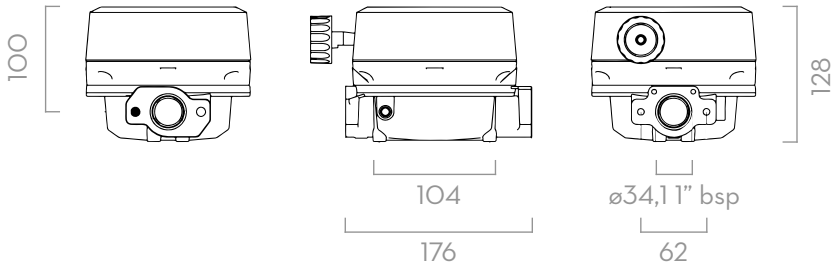

Dimensions expressed in millimeters

MATERIALS

- NUTATING DISK CHAMBER: TECHNOPOLYMER
- BODY: ALLUMINIUM

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW DIRECTION	FLOW RATE		WORKING PRESSURE		PULSER	INLET OUTLET
				L/MIN	GPM	BAR	PSI	P/L (P/GAL)	
K33 METER									
000550160	K33 VER. A	O	←	20-120	5-32	10	142	YES	1" BSP
000551160	K33 VER. B	O	↕	20-120	5-32	10	142	YES	1" BSP
000557000	K33 VER. C	O	↕	20-120	5-32	10	142	YES	1" BSP
000558000	K33 VER. D	O	→	20-120	5-32	10	142	YES	1" BSP

UPON REQUEST AVAILABLE IN NPTF VERSION AND DISPLAY IN GALLON/QUARTER OR PINT